

CHEMICAL COLLECTION CABINETS (CCC)



Shown: Single cabinet fixed drum solvent collection system. (CCC-1-F-RP-P)



Shown: Dual cabinet with removable drums. (CCC-2-R-RP)

Wastech standard chemical collection cabinets are designed for safely and efficiently collecting and storing chemicals and other non-flammable hazardous liquids.

- Safely store and transfer chemical waste automatically.
- Chemical cabinets are fabricated with chemical resistant polypropylene.
- Corrosion resistant air operated valves for drum filling.
- Fits standard Polyethylene chemical drum.
- Simplex (one drum) or duplex (two drum) configurations.
- 55 gallon or 110 gallon storage capacity.
- Designed to integrate directly with Wastech air operated pump lift station AOPLS series.
- Polyethylene and PVC cabinets available as an option.
- Available Polypropylene drum ramps.
- Extra wide doors available to allow drums to be loaded with mobile drum handlers.
- Custom cabinet and tank sizes available, call or e-mail sales.

Standard Features

- Heavy duty, 3/4" thick polypropylene construction.
- Cabinet, base and seismic tie downs fully fabricated from 3/4" thick polypropylene.
- 2" vent port.
- Cabinet leak proof sill 2" deep.
- One or two 55 gallon polyethylene drums.
- Polypropylene air operated diaphragm discharge pump for fixed drum units.
- All valves and piping are polypropylene or PVC.
- Air operated valves for drum filling.
- Multipoint level switch assembly.
- Containment tray leak switch.
- Electrical quick disconnects to remove level switches.
- Drum valve quick disconnect system for ease of connection for removable drum units.
- Standard control panel is available in fixed and remote mounted configurations.
- Available view ports and vents on cabinet doors.
- Available steel rollers for removable drum units.
- Available alarm integration to BMS.

ORDERING INFORMATION


CCC			
Number of Drums (Choose One)			
-1	One 55 Gallon Drum, Polyethylene		
-2	Two 55 Gallon Drums, Polyethylene		
Fixed or Removable Drums (Choose One)			
-F	Drums are permanently mounted to the cabinet		
-R	Drums are installed on rollers, includes liquid and electrical disconnects		
Enclosure Rating (Choose One)			
-RP	Remote mounted panel		
-CM	Cabinet mounted panel		
Drum pump out option (Fixed drums only)			
-P	Includes one air operated pump		
Additional Features (Choose Any)			
-CR	PP drum cabinet ramp w/slip resistant strips		
-WP	Outdoor weather proof cabinet upgrade		

Example Part Number

CCC	-1	-F	-RP	-P		
CCC	-2	-R	-CM	-	-WP	

DIMENSIONS AND TECHNICAL INFORMATION
Solvent Cabinet Outside Dimensions

	Part #	Width X (in)	Depth Y (in)	Height Z (in)
One Drum	CCC-1	32	31	66
Two Drum	CCC-2	62	31	66

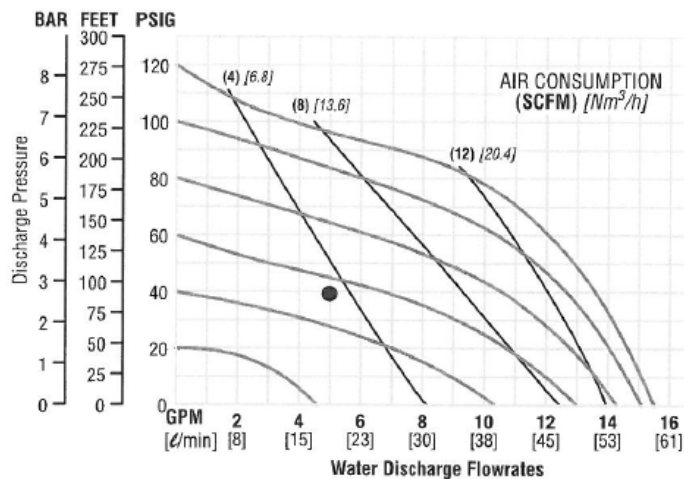

Discharge Pump Flow Curve — For fixed drum cabinets only. System is designed to discharge one drum at a time. Both single and dual drum cabinets have one discharge pump. The drum to be discharged is selected by the operator on the control panel.



Control Panel — Dual removable drum cabinet system with remote mount version.